


Specifications

AC Input	100-135 volts/60 Hz (220 volts/50 Hz optional)
Operating Temperature	0° to 50° C (32° to 122° F)
Storage Temperature	-20° to 60° C (-4° to 140° F)
Relative Humidity	0-95%
Cooling	Convection
DC Output	2.27 VPC for lead acid
Current Limit	Approximately 150%
Enclosure	304 stainless steel hinged cover to facilitate installation

Model Number	D.C. Output		Height Inches	Width Inches	Depth Inches	Approx. Weight
	Amps	System Voltage				
12 Volt						
CI1205C*	5	12	9.5	7.5	5	9
CI1210C	10	12	9.5	7.5	6.25	13
CI1215A	15	12	9.5	7.5	6.25	15
CI1220C	20	12	9.5	7.5	6.25	17
CI1230C	30	12	11.5	9	8.75	20
CI1240C	40	12	11.5	9	8.75	30
CI1260C**	60	12	13	11.5	10.25	38
24 Volt						
CI2405C*	5	24	9.5	7.5	5	12
CI2410C	10	24	9.5	7.5	6.25	17
CI2420C	20	24	11.5	9	8.75	30
CI2430C**	30	24	13	11.5	10.25	38
CI2440C**	40	24	13	11.5	10.25	46
32 Volt						
CI3205C*	5	32	9.5	7.5	5	15
CI3220C**	20	32	13	11.5	10.25	38
CI3230C**	30	32	13	11.5	10.25	46
CI3240C**	40	32	13	11.5	10.25	60
<i>Consult factory for additional models</i>						

*DC Ammeter Only

**Switch Optional

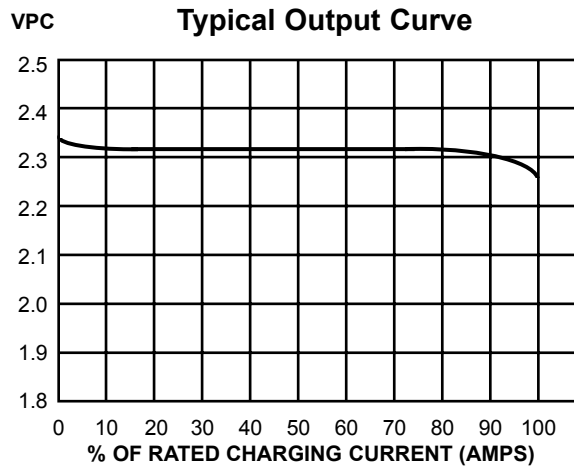

Ordering Information

When ordering, please specify:

1. Model number
2. AC input: voltage & frequency
3. Battery type and number of cells
4. Ampere-hour capacity of battery
5. Recharge time desired
6. Description of load
7. Options

Contact your Charles sales representative for specific product information.



Technical Support

- Field-proven and unequalled 24-hour technical support
- Individualized application consultation
- Training courses available

Visit our website at <http://www.charlesindustries.com>



Charles Industries, Ltd.
Industrial Group
 5600 Apollo Drive
 Rolling Meadows, IL 60008 USA

Voice: (847) 806-6300
 FAX: (847) 806-6352
 E-mail: mktserv@charlesindustries.com

and C-CHARGER™ are trademarks of Charles Industries, Ltd.